

Climate  
Control

IMI Pneumatex

# Vento Connect



## Cyclonic vacuum degassing

For heating, solar, and chilled water systems

# Vento Connect

Vento Connect is a cyclonic vacuum degasser for heating and solar systems, and chilled water systems. Its use is particularly recommended where high performance, compact design and precision are required. The industrial version VI is especially designed for high pressure applications up to 20.5 bar. The **BrainCube Connect** control panel allows a new level of connectivity, enabling communication with the BMS system, other BrainCubes as well as remote operation of the pressurisation system through live viewing.



## Key features

**Higher efficiency cyclonic vacuum degassing**  
Significantly higher efficiency than most other vacuum degassing systems.

**Direct degassing of make-up water**  
For additional protection against corrosion.

**Easy Commissioning, Remote Access and Trouble-shooting**  
Integrated standard connections to our IMI Webserver and to BMS.

**Vento Compact**  
Compact design for floor and wall hanging installation

**Optional sound-absorbing wall bracket**  
For Vento Compact in installation locations particularly sensitive to structure-borne sound

## Technical description – Control unit TecBox

**Applications:**  
Heating, solar and chilled water systems.  
For systems according to EN 12828, SWKI HE301-01, EN 12976, ENV 12977, EN 12952, EN 12953

**Media:**  
Non-aggressive and non-toxic system media. Ethylene or propylene glycol-based antifreeze up to 50%.

**Pressure:**  
Min. admissible pressure, PSmin: -1 bar  
Max. admissible pressure, PS: see Articles

**Temperature:**  
Min. admissible temperature,  $t_{Smin}$ : 0°C  
Max. admissible temperature,  $t_{Smax}$ : 90°C  
Max. admissible ambient temperature,  $t_{Amax}$ : 40°C  
Min. admissible ambient temperature,  $t_{Amin}$ : 0°C

**Supply voltage:**  
Vento V/VF:  
1 x 230 V (± 10 %) / 50 Hz  
Vento VI:  
Main voltage: 3x400V (± 10%) / 50Hz (3P+PE)  
Control voltage: 230V (± 10%) / 50Hz (P+N+PE)

**Electrical connections:**  
Onsite fuses according to power demand and local norms  
4 (V/VI) or 3 (VF) potential-free outputs (NO) for external alarm indication (230V max. 2A)  
1 RS 485 In/Output  
1 Ethernet RJ45 plug socket  
1 USB Hub plug socket  
Terminal strip in PowerCube for direct wiring (Vento VI).

**Enclosure class:**  
IP54 according to EN 60529

**Mechanical connections:**  
Vento V/VI:  
Sin1: inlet from the system G3/4"  
Sout: outlet to the system G3/4"  
Swm: inlet water make-up G3/4"

Vento VF:  
Sin1: inlet from the system G1/2"  
Sout: outlet to the system G1/2"  
Swm: inlet water make-up G3/4"

**Material:**  
Metal components with medium contact: carbon steel, cast iron, stainless steel, AMETAL®, brass, gun metal.

**Transportation and storage:**  
In frostless, dry places.

**Standard:**  
Constructed according to MD 2006/42/EC, Annex II 1.A  
EMC-D. 2014/30/EU

## Function, Equipment, Features

### Control unit TecBox

- BrainCube Connect control for an intelligent, fully automatic, safe system operation. Self-optimising with memory function.
- Resistive 3.5" TFT illuminated colour touch display. Web-based interface with remote control and live view. User-friendly, operation-orientated menu layout with slide and tap operation, step-by-step start up procedure guide and direct help in pop-up windows. Representation of all relevant parameters and operation status in plain text and/or graphical, multilingual.
- Standardised integrated connections (Ethernet, RS 485) to the IMI webserver and BMS (Modbus and IMI Pneumatex protocol).
- Software updates and data logging possible via USB connection
- Data logging and system analysis, chronological message memory with prioritisation, remotely controllable with live view.
- Periodical automatic self-test, daily checking the vacuum. The BrainCube Connect generates an alarm if necessary.
- High quality metal cover.

### Vacuum Degassing

- Flow capacity of approx. 1000 l/h (Vento V/VI) and 200 l/h (Vento Compact) for system degassing.
- Vacusplit: Degassing programs for permanent operation with cyclonic technology. Gas under saturation of system water of nearly 100%. Eco automatic operation when no air is detected, savings on electricity consumption of the pump.
- Oxystop degassing: Direct degassing of make-up water. Significant oxygen reduction in the make-up water. Safely degasses both system and make-up water in a specially designed cyclone vessel (inside the Tecbox), with the advantage of low keeping temperature of the expansion vessel, without the need to insulate the vessel. Protects the system against corrosion.

### Water make-up


- Fillsafe: water-make up monitoring and control with integrated contact water flow meter and solenoid valve.
- Connection for optional Pleno P BA4R/AB5(R) water make-up devices for tap water protection following EN 1717.
- Softsafe monitoring and control for an optional refill water treatment device.

## DNe standard values for connection pipes for Vento V/VI/Compact

		V 2.1	V 4.1	V 6.1	V 8.1	V 10.1	V 14.1	VI 19.1	VI 25.1
Length up to approx. 10 m	<b>DNe</b>	25	25	25	25	25	25	25	25
Length up to approx. 20 m	<b>DNe</b>	25	25	25	25	25	25	25	25
Length up to approx. 30 m	<b>DNe</b>	32	32	32	32	32	32	32	32

## Quick selection

Operation range dpu  
Type

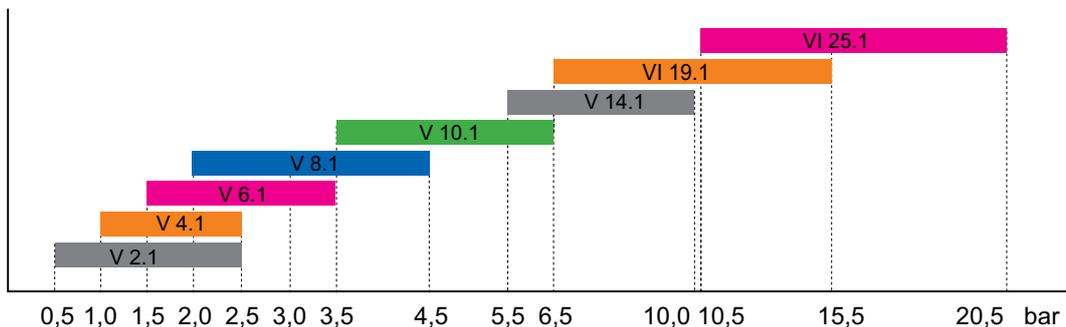

dpu

		V 2.1	V 4.1	V 6.1	V 8.1	V 10.1	V 14.1	VI 19.1	VI 25.1
dpu min	bar	0.5	1	1.5	2	3.5	5.5	6.5	10.5
dpu max	bar	2.5	2.5	3.5	4.5	6.5	10	15.5	20.5

## Equipment

### Connection pipes

Vento V\_: table DNe

### Pleno Refill

Water softening and demineralization modules in combination with Vento V Connect. The control is made through the BrainCube of the TecBox. Connected water softening units must have a minimum flow rate of 1300 l/h for direct connection. If the water treatment unit has a lower flow rate a flow limiter in the inlet of the water meter must be used (a 240 l/h flow limiter is enclosed with the Vento).

### Pleno

Water make-up modules in combination with Vento V Connect. Control is made through the BrainCube of the Vento V TecBox.

### Zeparo


Air vent Zeparo ZUT or ZUP at each high point for venting during the filling and during the draining process. Separator for sludge and magnetite in each system in the main return to the heat generator.

**Further accessories, product and selection details:** Datasheets Pleno Refill, Zeparo and Accessories.

## Principle scheme

### Vento V/VI Connect


Grey area is optional

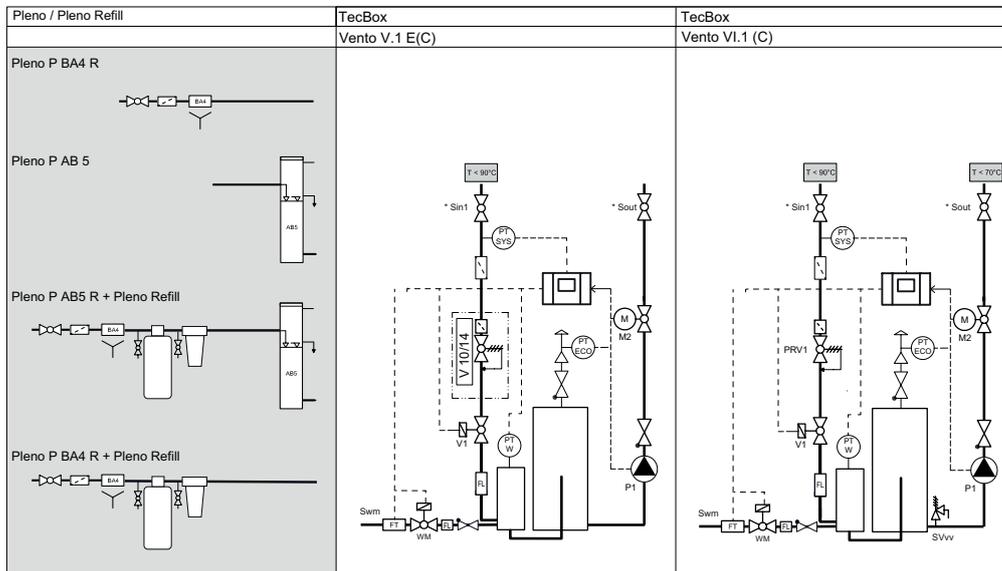

\* When connecting to rigid piping, it is essential to ensure that there is no axial, vertical or horizontal tension. The connections must not be loaded with any additional weights. Maximum tightening torques must be observed where specified. If no information on tightening torques is available, the state of the art for the respective connection must be observed. A flexible connection is preferred over rigid connection.


### Vento Compact Connect (V 2.1 FE)

Grey area is optional

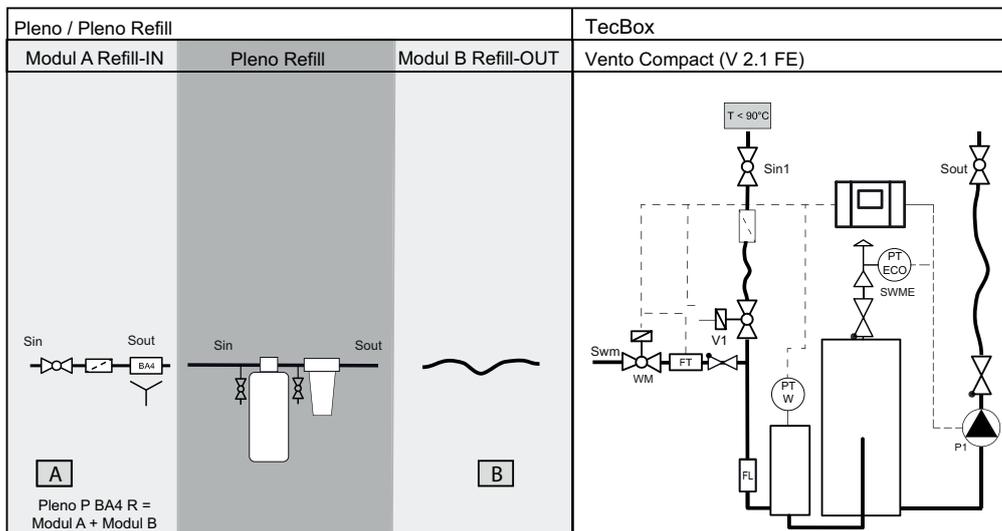


## Installation

### Vento V/VI Connect

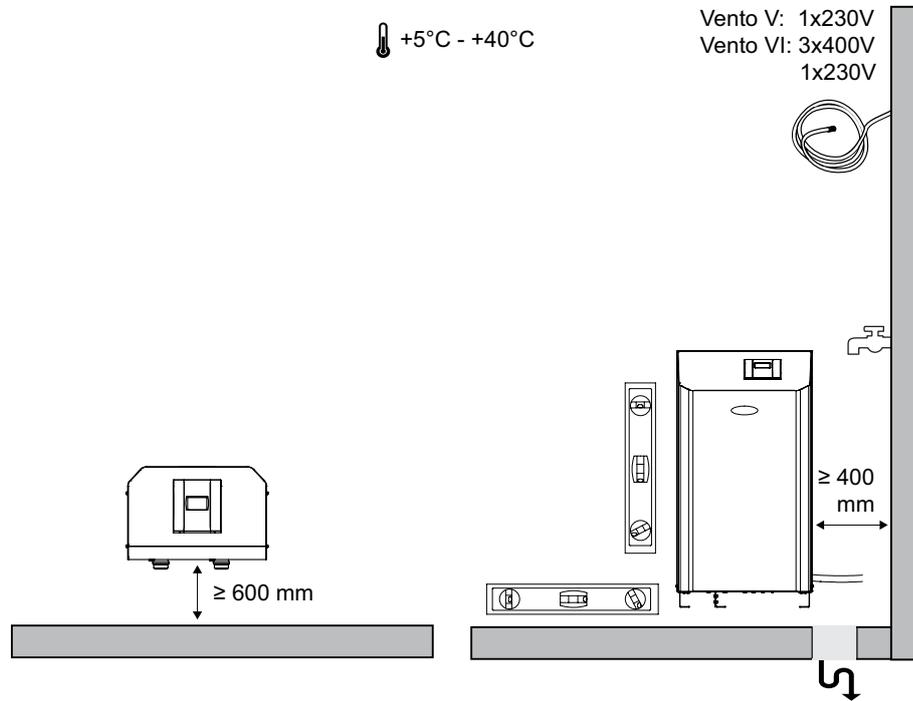

### Vento V 2.1 FE Connect

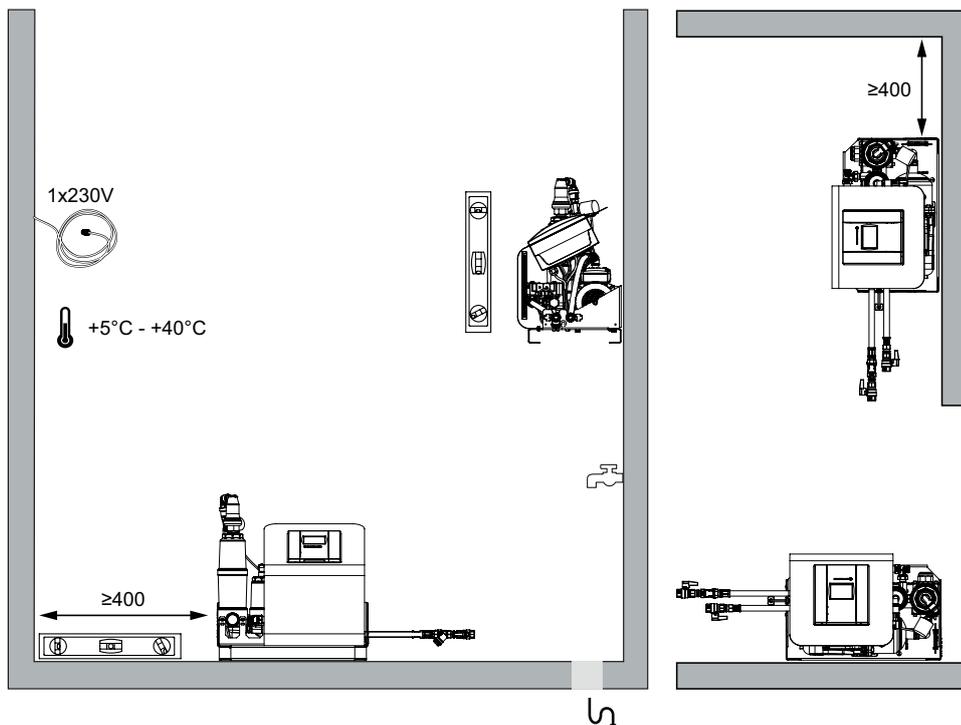


## Application examples

### Vento V/VI/VF Connect for heating

TecBox with 1 pump, cyclonic vacuum degassing and Pleno P BA4 R for water make-up.

#### Example for heating systems, return temperature $t_r \leq 90^\circ\text{C}$

(May require changes to meet local legislation)

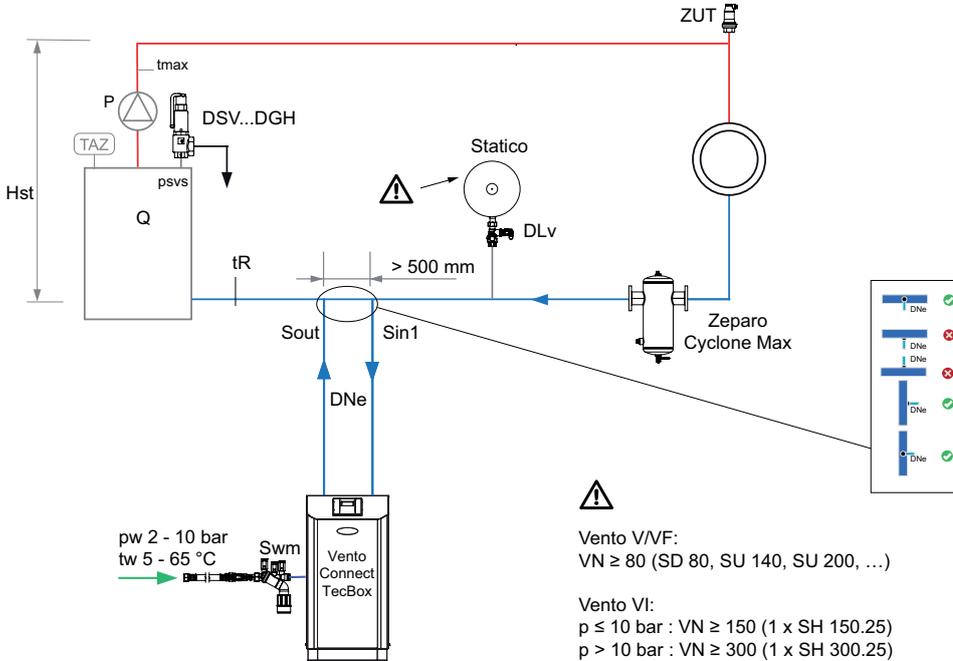


### Vento V/VI 1.EC Connect for cooling

TecBox with 1 pump, cyclonic vacuum degassing, Pleno P AB5 R for water make-up and Pleno Refill for water treatment unit for softening or demineralising the make-up water.

#### Example for cooling systems, return temperature $0^\circ\text{C} < t_r \leq 5^\circ\text{C}$

(May require changes to meet local legislation)

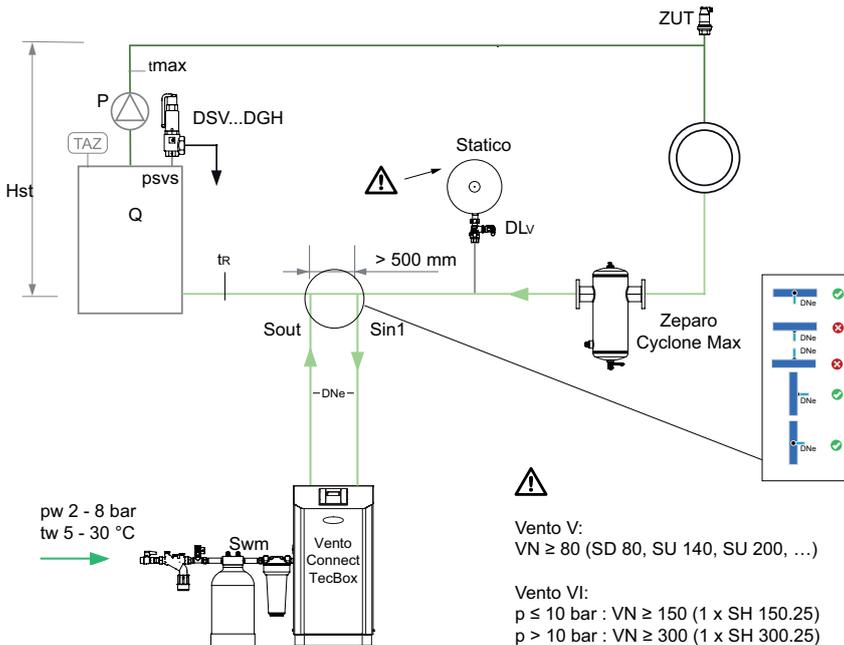


**Zeparo Cyclone Max** for the central separation of sludge.

**Zeparo ZUT** for automatic venting during filling and during draining.

**Further accessories, product and selection details, see:** Datasheet Pleno Connect, Zeparo and Accessories.

## Control unit TecBox, Vento Compact Connect Heating




### Vento Compact Connect

Cyclonic vacuum degassing unit. 1 pump and 2 solenoid valves, cyclonic vacuum degassing unit, connection for water make-up with solenoid valve and water meter, and BrainCube Connect control. 2 connection hoses with ball valves. Connections G1/2".

Type	W	H	T	m [kg]	PeI [kW]	VNd [m³]	SPL [dB(A)]	dpu [bar]	EAN	Article No
<b>10 bar (PS)</b>										
V 2.1 FE	520	575	350	32	0,75	10	~55*	0,5 - 2,5	7640161642294	303030-20400

## Control unit TecBox, Vento Connect Heating

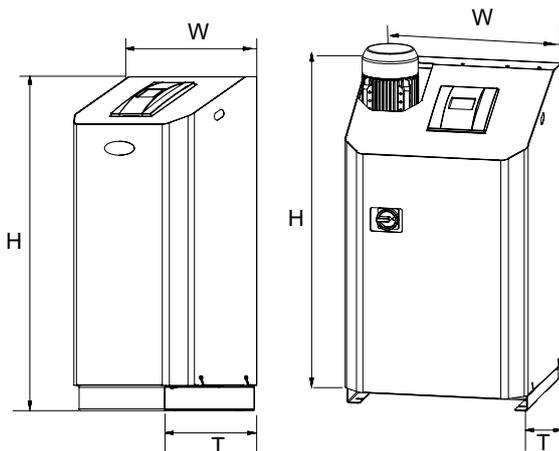

### Vento V/VI .1 E Connect

Cyclonic vacuum degassing unit. 1 pump, 1 solenoid valve and 1 motor driven valve, 1 cyclonic vacuum degassing unit, connection for water make-up with solenoid valve and water meter, and BrainCube Connect control.

Type	W	H	T	m [kg]	PeI [kW]	VNd [m³]	SPL [dB(A)]	dpu [bar]	EAN	Article No
<b>10 bar (PS)</b>										
V 4.1 E	500	920	530	40	0,75	300	~55*	1-2,5	7640161629752	812 1101
V 6.1 E	500	920	530	42	1,1	300	~55*	1,5-3,5	7640161629769	812 1102
V 8.1 E	500	920	530	43	1,4	300	~55*	2-4,5	7640161629776	812 1103
V 10.1 E	500	1300	530	57	1,7	300	~60*	3,5-6,5	7640161629783	812 1104
<b>13 bar (PS)</b>										
V 14.1 E	500	1300	530	67	1,7	300	~60*	5,5-10	7640161629790	812 1105
<b>25 bar (PS)</b>										
VI 19.1 E	570	1086	601	78	2,6	300	~60*	6,5-15,5	7640161636774	303031-60600
VI 25.1 E	570	1258	601	85	3,4	300	~60*	10,5-20,5	7640161636781	303031-60700

T = Depth of the device


VNd = Water capacity for which a device is rated

PeI = Electric load

dpu = Working pressure range

\*) Pump operation

## Control unit TecBox, Vento Connect Cooling

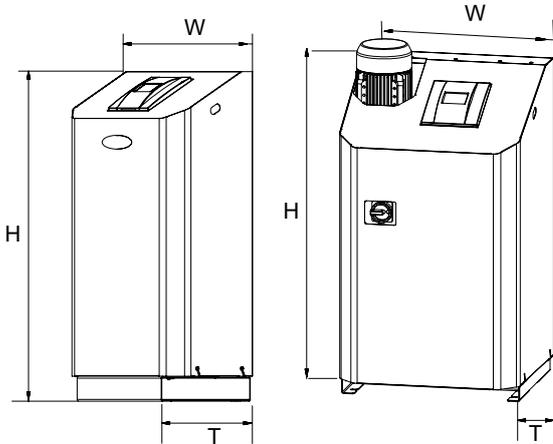

### Vento V/VI .1 EC Connect

Cyclonic vacuum degassing unit. 1 pump, 1 solenoid valve and 1 motor driven valve, 1 cyclonic vacuum degassing unit, connection for water make-up with solenoid valve and water meter, and BrainCube Connect control.

Cooling insulation with condensation water protection.

Type	W	H	T	m	Pel	VNd	SPL	dpu	EAN	Article No
				[kg]	[kW]	[m <sup>3</sup> ]	[dB(A)]	[bar]		
<b>10 bar (PS)</b>										
V 4.1 EC	500	920	530	41	0,75	300	~55*	1-2,5	7640161629806	812 1201
V 6.1 EC	500	920	530	43	1,1	300	~55*	1,5-3,5	7640161629813	812 1202
V 8.1 EC	500	920	530	44	1,4	300	~55*	2-4,5	7640161629820	812 1203
V 10.1 EC	500	1300	530	58	1,7	300	~60*	3,5-6,5	7640161629837	812 1204
<b>13 bar (PS)</b>										
V 14.1 EC	500	1300	530	68	1,7	300	~60*	5,5-10	7640161629844	812 1205
<b>25 bar (PS)</b>										
VI 19.1 EC	570	1086	601	86	2,6	300	~60*	6,5-15,5	7640161636958	303031-70600
VI 25.1 EC	570	1258	601	94	3,4	300	~60*	10,5-20,5	7640161636941	303031-70700

T = Depth of the device


VNd = Water capacity for which a device is rated

Pel = Electric load

dpu = Working pressure range

\*) Pump operation

## Sound-absorbing wall bracket for Vento VS/VF Connect




### Wall bracket WB VSF

Sound-absorbing wall bracket for Simply Vento Connect and Vento Compact Connect. Reliably reduces the transmission of structure-borne sound from the unit to the mounting wall to a minimum.

Type	W*	H	T	m	EAN	Article No
				[kg]		
WB VSF	376	500	520	7,5		301032-30021

\*) Centre-to-centre distance for optimum mounting

## Pleno P water make-up module for Vento V/VI/VF



### Pleno P BA4 R

Hydraulic unit for water make-up operation with Vento/Transfero Connect, Pleno PX/PIX, Simply Compresso C 2.1-80 SWM and in combination with Pleno Refill modules. Features a shut off valve, check valve, filter and a type BA backflow preventer (protection class 4) according to EN 1717. Connection (Swm): G1/2

Type	PS [bar]	W	L	H	m [kg]	qwm [l/h]	EAN	Article No
BA4 R	10	210	1300	135	1,1	350* 250** 50*** q(pw-pout) ****	7640161630147	813 3310

qwm = make-up water flow


\* maximum average value for make-up water degassing with Vento V/VI and Transfero TV/TVI

\*\* maximum average value for make-up water degassing with Vento Compact

\*\*\* when using flow limiter for operation with low flow water treatment cartridges

\*\*\*\* for combination with Pleno PX/PIX see see q(pw-pout) diagramm in Pleno Connect datasheet


## Pleno P water make-up modules for Vento V/VI

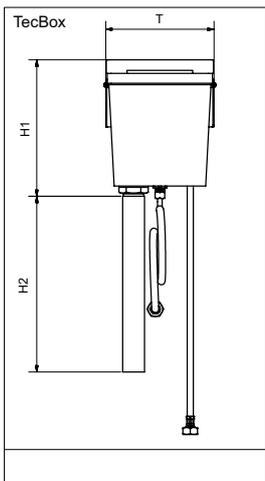

### Pleno P AB5

Hydraulic unit for water make up operation with Vento/Transfero Connect. Consists of a breaktank type AB (protection class 5) according EN 1717. For installation on the back of each unit. Can be used for 3rd party softening modules which do not fulfil the requirement of qwm min 1300 l/h and therefore can't be directly connected.

Type	PS [bar]	T	H1	H2	m [kg]	qwm [l/h]	EAN	Article No
AB5	10	220	280	1000	1,83	200	7640161630154	813 3320



### Pleno P AB5 R


Hydraulic unit for water make up operation with Vento/Transfero Connect. Consists of Pleno P BA4 R back flow preventer and Pleno P AB5 modules, with protection class 5 according to EN 1717.

Type	PS [bar]	T	H1	H2	m [kg]	qwm [l/h]	EAN	Article No
AB5 R	10	220	280	1000	3,8	200	7640161630161	813 3330

qwm = make-up water flow

T = Depth of the device

## Pleno Refill



### Pleno Refill

Hydraulic unit for water softening together with Vento/Transfero Connect Tec Boxes. Filter with 25 µm mesh size to protect the hydronic system. Softening bottle filled with high grade resin.


3/4" swivelling nut, 3/4" external thread suitable for flat gasket.

Nominal pressure: PS 8

Max. working temperature: 45°C

Min. working temperature: > 4°C

Type	Capacity l x °dH	S <sub>in</sub>	S <sub>out</sub>	D	H	L	m [kg]	EAN	Article No
Refill 16000	16000	G3/4	G3/4	195	383	455	9,1	7640161630475	813 3210
Refill 36000	36000	G3/4	G3/4	220	466	455	13	7640161630482	813 3220
Refill 48000	48000	G3/4	G3/4	270	458	455	16,2	7640161630499	813 3230



### Pleno Refill Demin

Hydraulic unit for water demineralisation together with Vento/Transfero Connect Tec Boxes. Filter with 25 µm mesh size to protect the hydronic system. Desalination bottle filled with high grade resin.

3/4" swivelling nut, 3/4" external thread suitable for flat gasket.

Nominal pressure: PS 8

Max. working temperature: 45°C

Min. working temperature: > 4°C

Type	Capacity l x °dH	S <sub>in</sub>	S <sub>out</sub>	D	H	L	m [kg]	EAN	Article No
Refill Demin 13500	13500	G3/4	G3/4	220	466	455	13	7640161630505	813 3260
Refill Demin 18000	18000	G3/4	G3/4	270	458	455	16,2	7640161630512	813 3270

→ = Flow direction

#### Additional information:


**Calculation:** Software HySelect

**Further accessories, product and selection details, see:**


Datasheet Pleno, Zeparo and Accessories.

## Wiring diagrams - Vento V/VF

### Power supply Vento V/VF

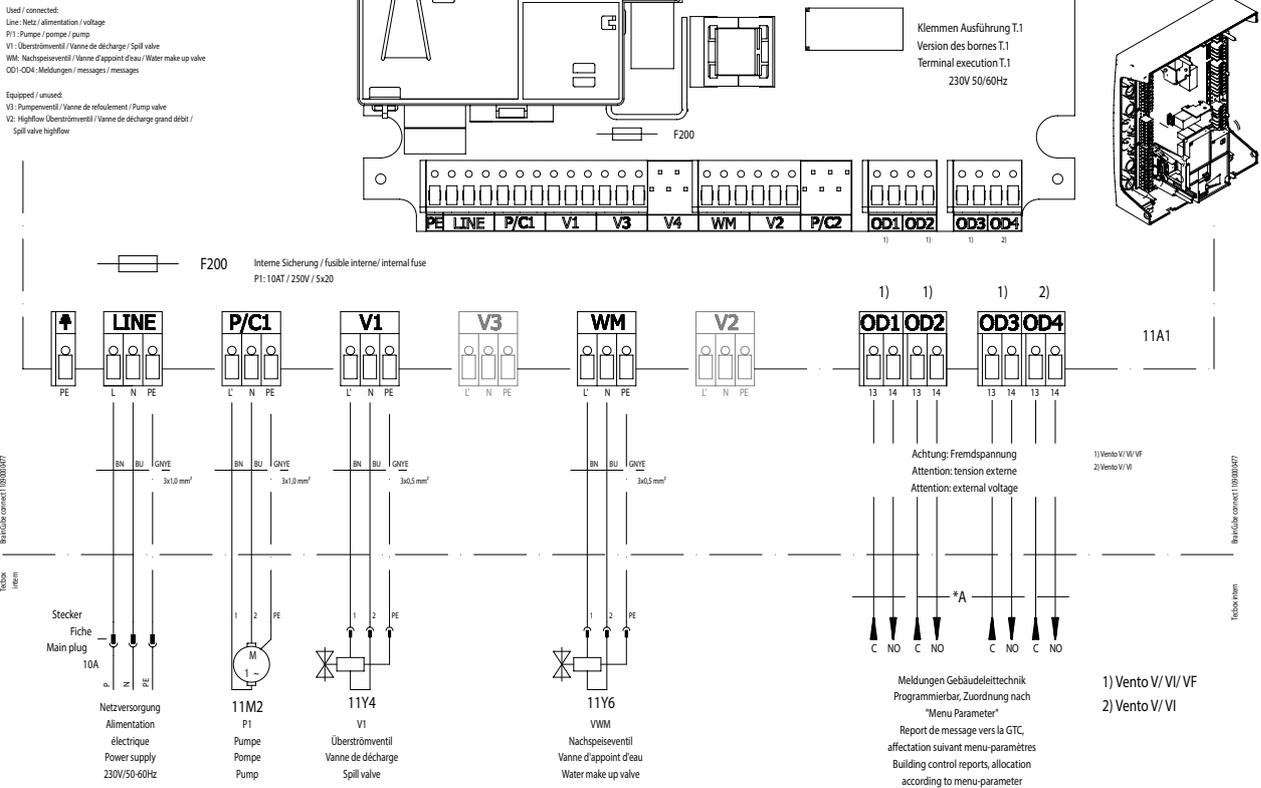


### Communication

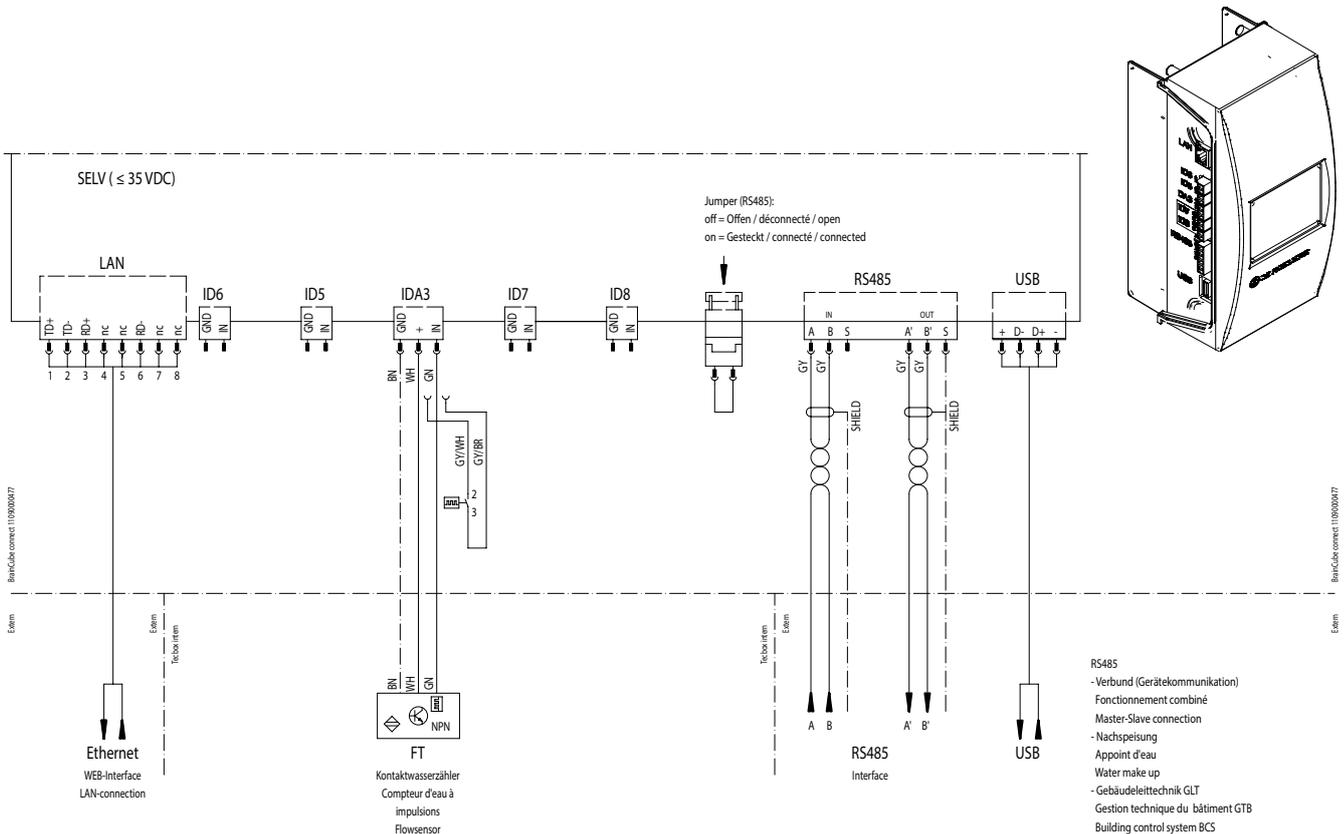

## Wiring diagrams - Vento VI



### Power supply Vento VI at PowerCube PCI

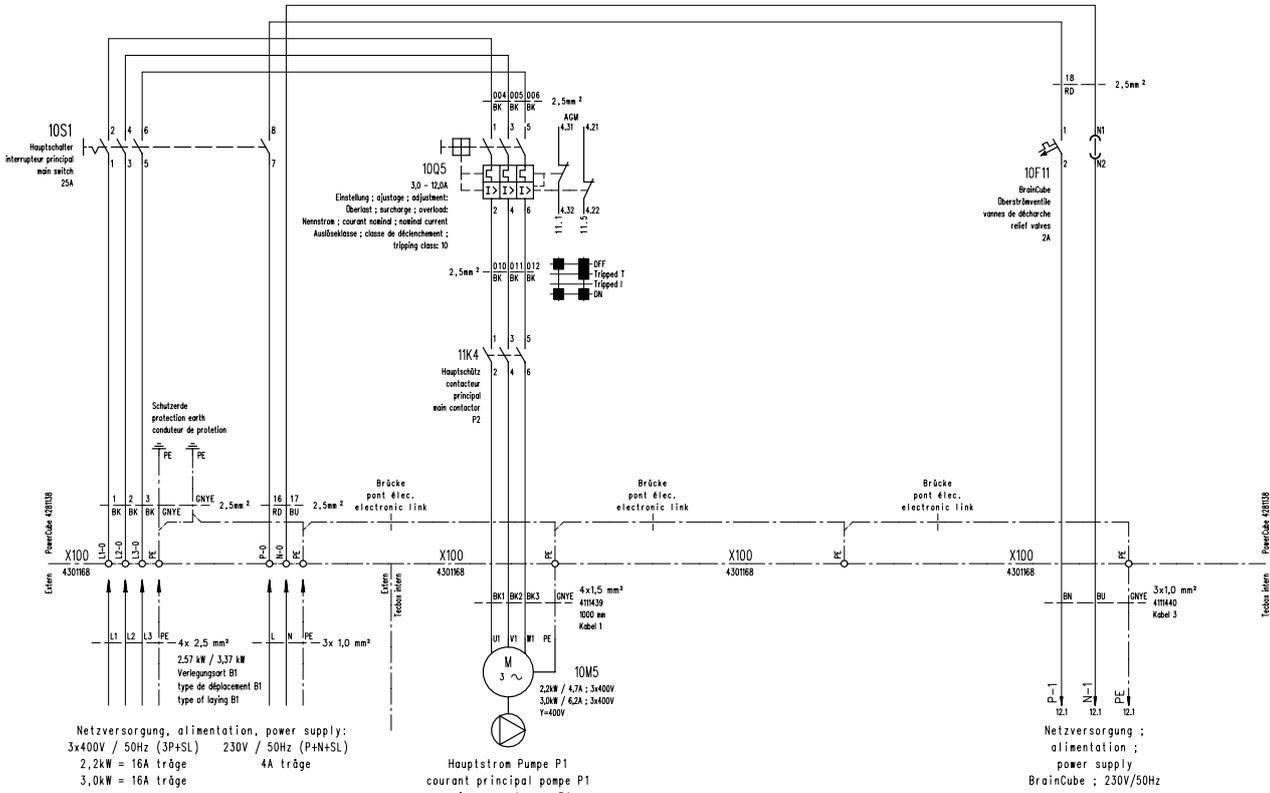

© by IMI Hydronic Switzerland AG



### 230V Section of the BrainCube

- P1 : Pumpe / pompe / pump
- V1 : Oberströmventil / Vanne de décharge / Spill valve
- WM: Nachspeiseventil / Vanne d'appoint d'eau / Water make up valve

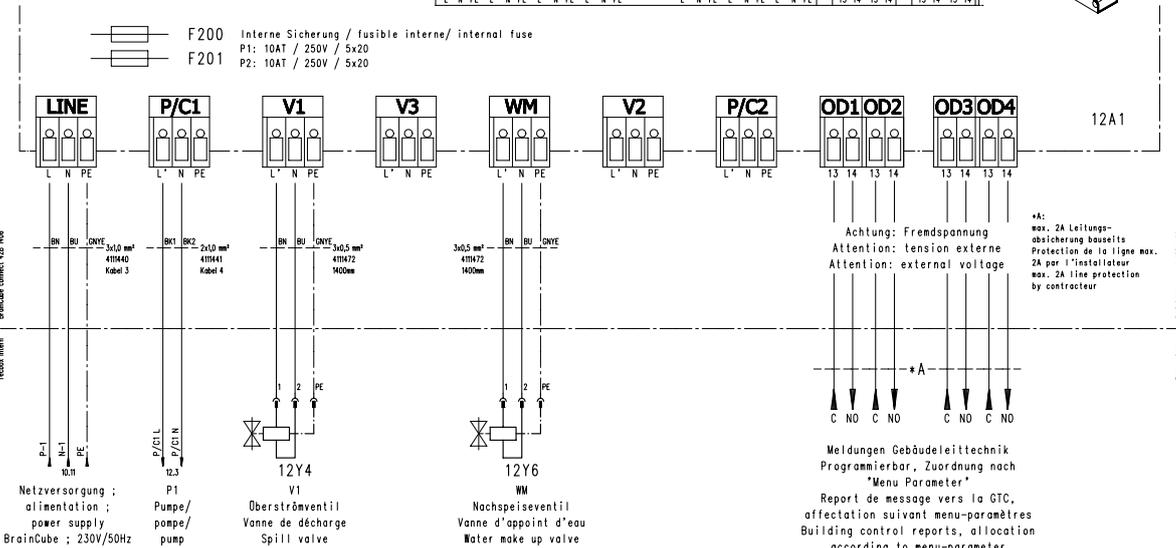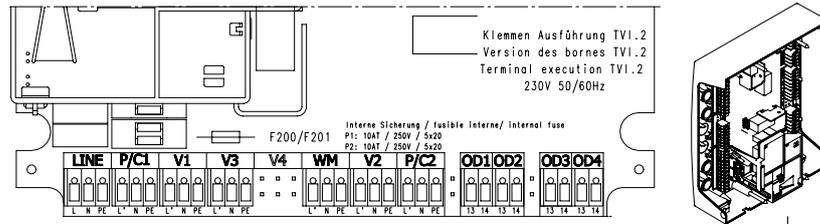

© by IMI Hydronic Switzerland AG

## Communication

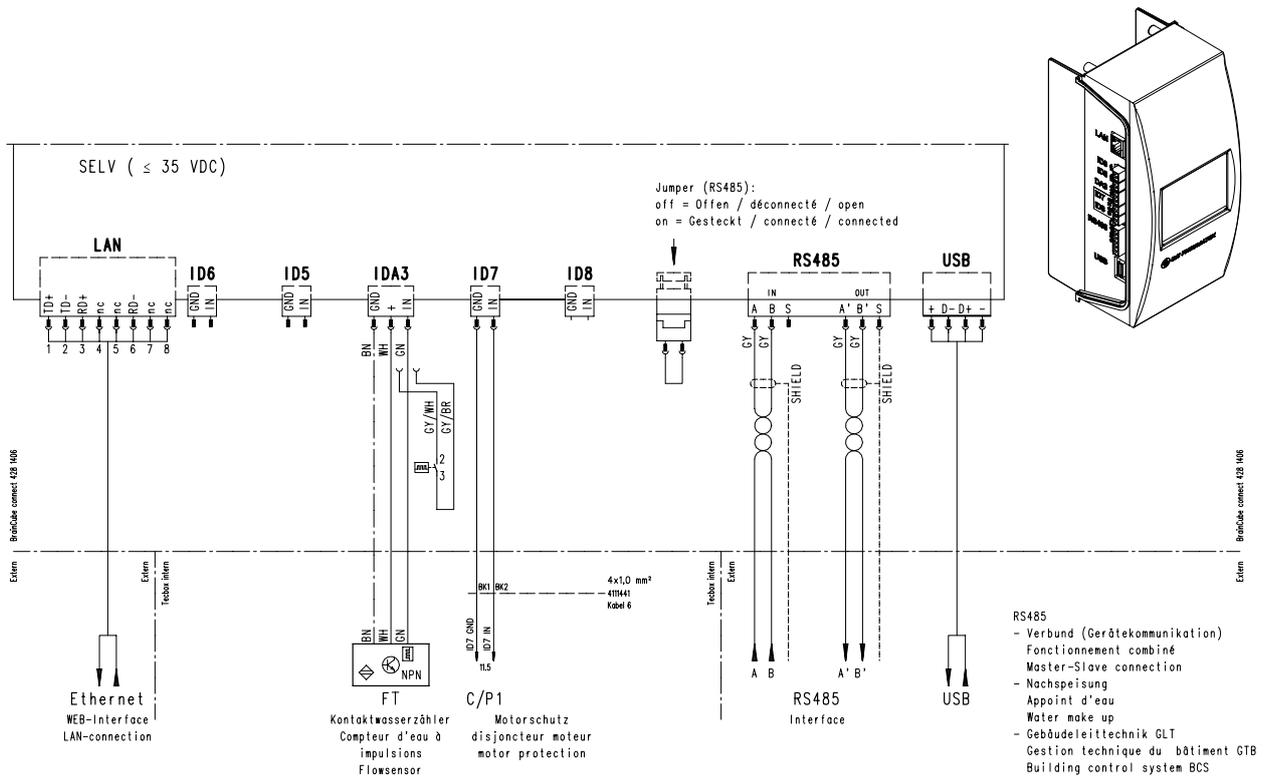



The products, texts, photographs, graphics and diagrams in this document may be subject to alteration by IMI without prior notice or reasons being given. For the most up to date information about our products and specifications, please visit [climatecontrol.imiplc.com](https://climatecontrol.imiplc.com).