

TA-Slider Product Range

I/O 160-500




750-1600



PT Ports

Temp pockets

Surface

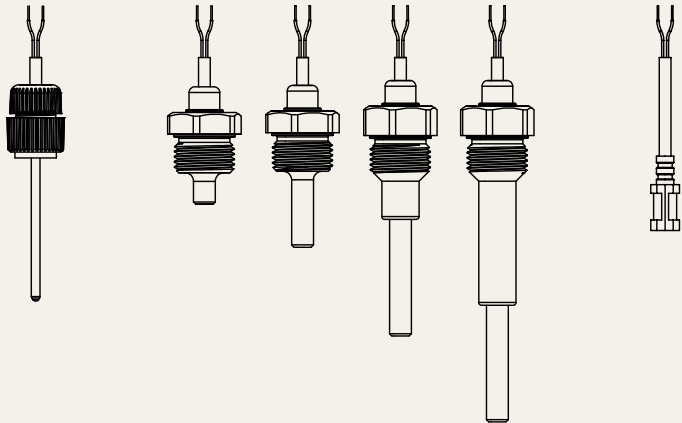

Sensors

TA-Slider 160

TA-Slider 160
Std version
I/O version
KNX version



TA-Slider 160
CO version
Plus version
KNX R24



TA-Slider 160
Fail-Safe I/O
Fail-Safe R24



TA-Slider 160
With BUS
communication



TA-Slider 160-T
I/O T version



Connect to 1
temperature sensor

TA-Slider 160
I/O 2T version



Connect to 2
temperature sensors

TA-Slider 500

TA-Slider 500
Std version
I/O version



TA-Slider 500
Fail-Safe I/O
Fail-Safe R24



TA-Slider 500
with BUS
communication



TA-Slider 500
Plus version



TA-Slider 500
I/O T version



Connect to 1
temperature sensor

TA-Slider 500
I/O 2T version



Connect to 2
temperature sensors

TA-Slider 750

TA-Slider 750
Std version
Fail-Safe
Plus/24V or HV



TA-Slider 750
Plus with BUS
communication



TA-Slider 750
Plus (with relay)
with or without BUS
communication



TA-Slider 750 2T
Plus (with relay)
BUS communication
Fail-Safe



Connect to 2
temperature sensors

TA-Slider 1600

TA-Slider 1600
Std version
Plus/24V or HV



TA-Slider 1600
Plus with BUS
communication



TA-Slider 1600
Plus (with relay)
with or without BUS
communication



TA-Slider 1600 2T
Plus (with relay)
BUS communication
Fail-Safe



Connect to 2
temperature sensors